

E L V E S E L V E S
 E L V E S E L V E S
 E L V E S E L V E S E L



Chameleon(Navy Blue)&Transparent Red



Chameleon(Forest Green)&Champaign Golden



Gun Gray&Chameleon(Black-Red)



Silver&Chameleon(Green-Gray)



Blazing Orange&Elegant Blue



Matt Piano Black&Glossy Piano Black



White&Tiffany Blue

VANYAR PRO DISC



FRAME ELVES VANYAR PRO DISC

FRAME: FULL-CARBON(TORAY T800 + T1000 CARBON FIBER)
 GEOMETRY: PRO
 SEAT CLAMP: INTEGRATED
 WEIGHT: 870g(SIZE 47, UNPAINTED, WITHOUT METAL PARTS)
 HEADSET BEARING: 1-1/2" X7mm UPPER, 1-1/2" X8mm LOWER
 BRAKE: FLAT MOUNT
 BOTTOM SIZE: ID:46mm, Width:86.5mm
 BOTTOM BRACKET: PRESS FIT BB386
 ELECTRIC DRIVETRAIN: DI2&E-TAP COMPATIBLE
 EPS MOULDING TECHNOLOGY
 FULL INTEGRATED CABLE ROUTING
 THRU AXLE DIMENSION: M12X1.5X163mm(142mm)
 MAX TYRE SIZE: 700CX30C
 MAX ROTOR SIZE: UP TO 160mm



FORK ELVES VANYAR PRO DISC

FORK: CARBON FIBER FORK
 WEIGHT: 430g(W/O THRU AXLE)
 OFFSET: 45mm
 BRAKE: FLAT MOUNT
 STEER TUBE LENGTH: 300mm
 THRU AXLE DIMENSION: M12X1.5X121mm
 MAX ROTOR SIZE: UP TO 160mm



COLOUR

CHAMELEON(NAVY BLUE)&TRANSPARENT RED
 CHAMELEON(FOREST GREEN)&CHAMPAIGN GOLDEN
 GUN GRAY&CHAMELEON(BLACK RED)
 SILVER&CHAMELEON(GREEN GRAY)
 BLAZING ORANGE&ELEGANT BLUE
 MATT PIANO BLACK&GLOSSY PIANO BLACK
 WHITE&TIFFANY BLUE



SEAT POST ELVES SEATPOST

LENGTH: 400mm
 WEIGHT: 215g(SEATPOST)
 SINGLE BOLE PIVOT PRECISE ADJUSTMENTS
 SEATPOST: FULL-CARBON
 SADDLE CLAMP: 7X7mm AL RAIL CLAMP AND 7X10mm
 CARBON RAIL CLAMP
 OFFSET: 12mm AND 25mm SEATPOST AVAILABLE



TORQUE VALUES

SADDLE RAIL BOLTS: 10-12Nm
 INTEGRATED SEAT POST CLAMP: 10-12Nm
 STEM (STEERER): 6Nm
 FRONT DERAILLEUR HANGER: 3Nm
 REAR DERAILLEUR HANGER: 2.5Nm
 WATER BOTTLE CAGE BOLTS: 3Nm
 FRONT/REAR CALIPER: 6Nm
 FORK COMPRESSION PLUG: 10Nm
 FRONT/REAR THRU AXLE: 6Nm
 COMPUTER MOUNT: 3Nm



ACCESSORIES

BB386-24R(Shimano) AND BB386-29R(SRAM DUB) AVAILABLE
 ELVES HEADSET
 INTEGRATED HANDLEBAR SPACERS 3pcsX10mm
 STANDARD REAR DERAILLEUR HANGER X2
 CABLE ROUTING ADAPTER FOR REGULAR STEM



CERTIFICATION


UCI APPROVED(UCI 44895)
 BOTH EN 14766 AND ISO 4210-6:2023



FRAME SIZE + WEIGHT

- 47: 870g/50: 890g/53: 920g/56: 950g/59: 980g/62: 1050g
 - UNPAINTED WEIGHT, W/O METAL PARTS, + 0/-30g

VANYAR PRO DISC GEOMETRY

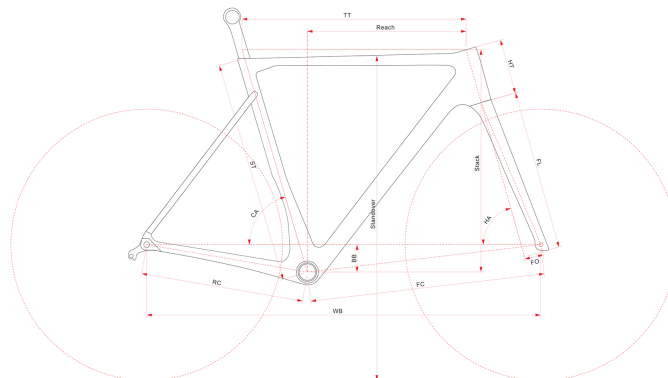

MODEL	SIZE	Reach(mm)	Stack(mm)	Seat Tube(mm)	Top Tube(mm)	WB(mm)	FO(mm)
VANYAR PRO DISC	47	375	505	470	510.3	968.1	45
	50	379	519	500	524.1	978.2	45
	53	386	537	530	540	980.3	45
	56	394	557	560	559	989.6	45
	59	403	576	590	576.4	1004.3	45
62	412	595	620	593.9	1018.9	45	
SIZE	RC(mm)	FL(mm)	CA(°)	HA(°)	BB(mm)	HT(mm)	Standover(mm)
47	410	386	75	72	69	87	750.5
50	410	386	74.5	72.5	69	100	773.4
53	410	386	74	73	69	117	796.6
56	410	386	73.5	73.5	69	136	821
59	410	386	73.5	73.5	69	157	844.6
62	410	386	73	73.5	69	178	867.7